PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACCU-GLASS PRODUCTS INC. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT THE WRITTEN PERMISSION OF ACCU-GLASS PRODUCTS INC.IS **PROHIBITED.**

Specifications:	
Voltage	500 VDC
Current	5A Max. @ 20˚C (per pin up to 20% of total number of pins)
Temperature	-321 ˚C to 150˚C (Dependant on O-ring type used)
Vacuum Level	HV 1x10 $^{-8}$ Torr.

Rev	Description	Date	Approved
A	INITIAL RELEASE	020810	C M



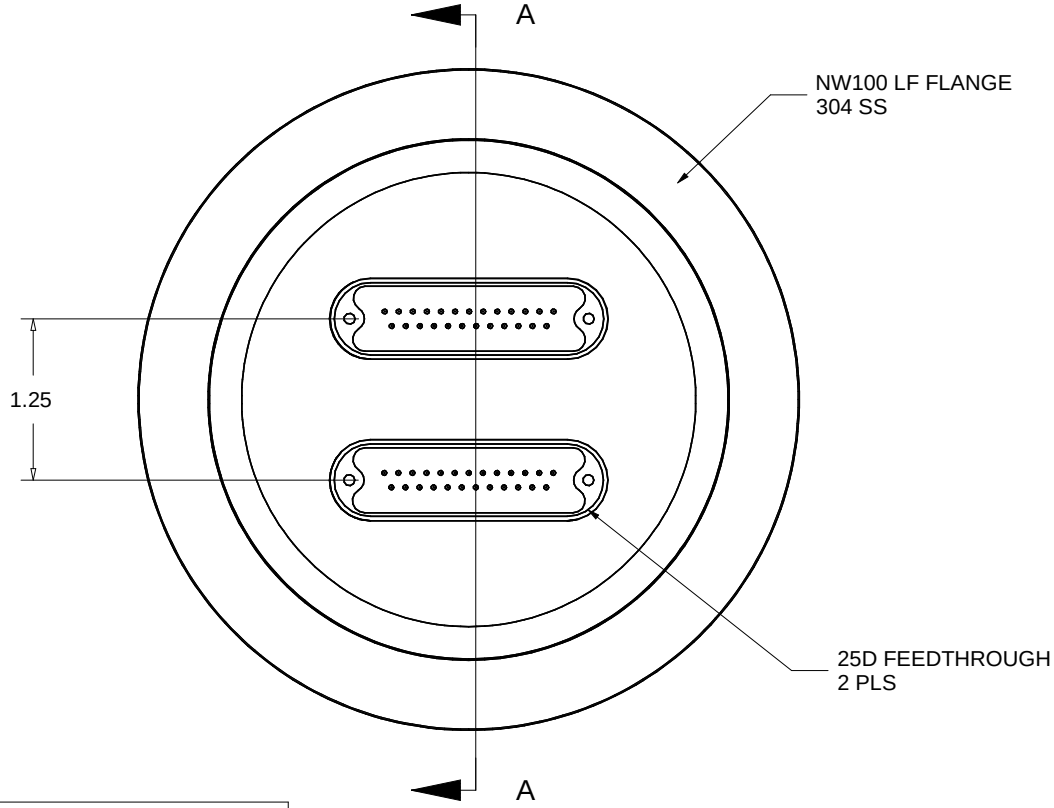

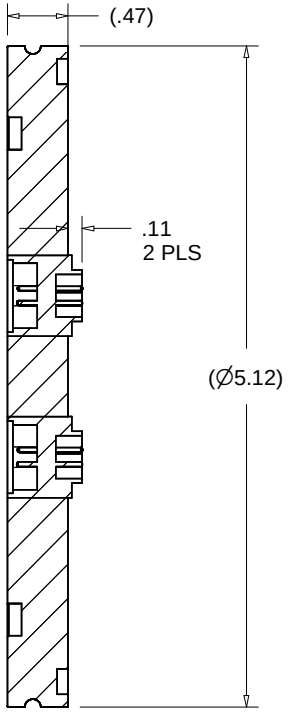

Section A-A

Related Flange Hardware	NW100 LF ISO Flange
P/N 202262,	Centering Ring - Stainless / Viton
P/N 210550,	Double Claw Clamp - Aluminum
P/N 210553,	Single Claw Clamp - Aluminum

Accu-Glass Products Inc.
700 Arroyo Ave.
San Fernando, CA 91340
TEL 818-365-4215
FAX 818-365-7074
accuglassproducts.com

Notes:
1. No detectable leaks @ 5x10 $^{-10}$ cc/s He.
2. DIM'S SYM ABOUT CENTERLINES

UNCONTROLLED WEB COPY

Material
SEE ABOVE

Tolerances unless otherwise specified.
.X ± .03
.XX ± .01
.XXX ± .005
Angular: +/- .5˚
Finish: Min. 63 Ra

Title: 25D2-L100
NW100 LF FLANGE WITH 2EA 25D FEEDTHROUGHS

Drawn By Date	CR 062209	DWG. NO. 100237	Rev. A
Approved	C M		Sheet 1 OF 1