
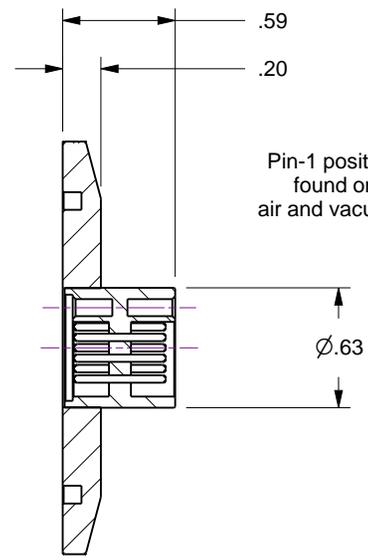
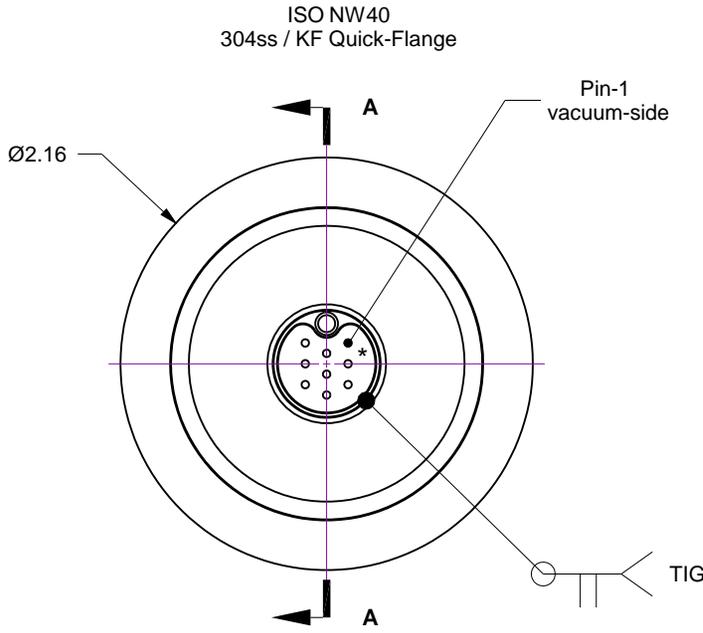



Notes

- 1. Leak test to 5x10E-10 Standard cc/sec of He
- 2. Product Specifications... Voltage, 500 VAC / Current, 5 amps per pin maximum @ 20 C (up to 20% of total number of pins) / Temperature, -26 to 150 C with Viton compound elastomer gasket / Vacuum, HV High-Vacuum, 1x10E-8 Torr
- 3. Related Hardware... Centering Ring with Gasket, AG Part No. 202220 / Hinged Clamp, AG Part No. 202225
- 4. Due to feedthrough's straight-through pin construction air-to-vacuum pin positions are reversed (mirrored).

Rev	Description	Date
B	Temperature range	

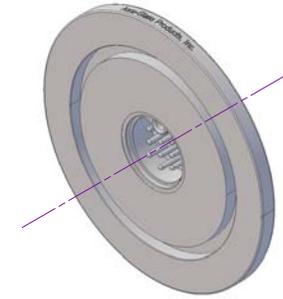

Section A-A

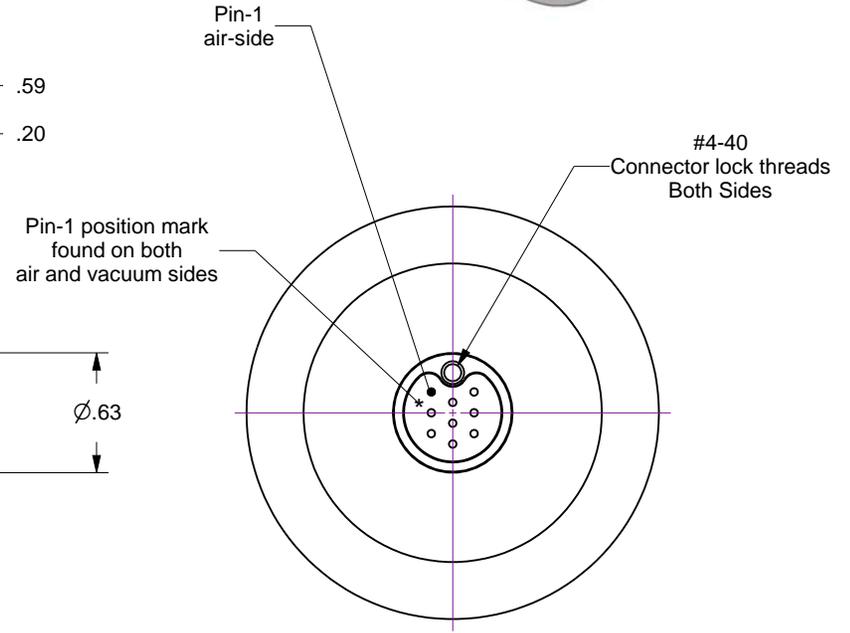

**Accu-Glass Products Inc.**  
 25047 Anza Drive  
 Valencia, CA 91355  
 T 818-365-4215  
 F 818-365-7074  
 www.accuglassproducts.com

**UNCONTROLLED WEB DRAWING**

Proprietary and Confidential  
 The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material Stainless Steel - 304	
Tolerances, unless otherwise specified	
.X ± .030	Angles ± 0.5°
.XX ± .010	Finish 63Ra
.XXX ± .005	

Title FT, Subminiature-C, 9-Pin, ISO NW40			
Drawn by Date	Ligeti 8/18/2014	No. <b>100015</b>	Rev. <b>B</b>
Approved			Sheet