Model

25KAP-5CX-19SC

25KAP-5CX-39SC

1. Five (5), female shields and female contacts on 25D Subminiature-D connector interface

2. Clean, handle and package assembly for UHV service.

Notes

Length 'A'

19"

39"

3. Connector front and back pieces are PEEK (polyether-etherketone) polymer.

4. Available in 19 and 39 inch standard lengths, see table for respective part numbers.

Description

5-Lead, 19 Inch Coaxial Cable Assemby

5-Lead, 39 Inch Coaxial Cable Assemby

Rev	Description	Date
D	Domodolod Dort	


B | Remodeled Part





Part No.

100640

100641





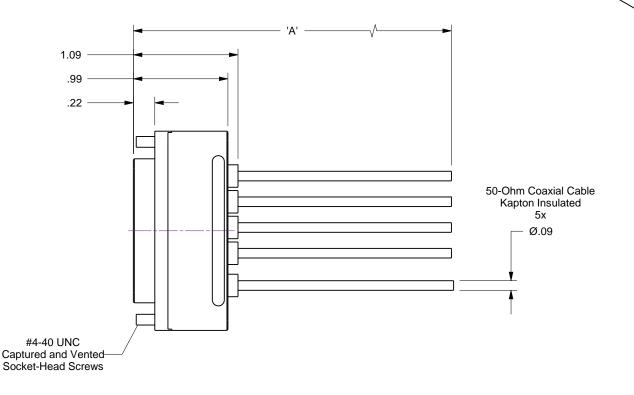



Accu-Glass Products Inc. 25047 Anza Drive Valencia, CA 91355 T 818-365-4215 F 818-365-7074 www.accuglassproducts.com

## **UNCONTROLLED WEB DRAWING**

Proprietary and Confidential The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

	Material	Title				
	See Individual					
	Tolera					
	unless otherw	Draw				
١,	.X ± . 030					

.XX ± .010

.XXX ± .005

ces, se specified	D
Angles ± 0.5°	
Finish 63Ra	Α

Cable, 5-Pin Coaxial on 25D Connector

Drawn by Date	Ligeti 7/15/2014	No.	100640		Rev.
Approved				She	et