


PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACCU-GLASS PRODUCTS INC. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT THE WRITTEN PERMISSION OF ACCU-GLASS PRODUCTS INC. IS **PROHIBITED.**

**HOLE NUMBER ASSIGNMENTS
 REAR VIEW**





NUMBERS DO NOT APPEAR ON PART

WIRING CAUTION
(ONLY WHEN USED IN CONJUNCTION WITH 19C FEEDTHROUGH):
 19C FEEDTHROUGH (NOT SHOWN) PIN 1 REVERSES POSITION FROM VACUUM SIDE TO AIR SIDE DUE TO THE MALE TO MALE CONFIGURATION OF THE FEEDTHROUGH. (MIRROR IMAGE)

THIS CAN BE ACCOUNTED FOR IN ONE OF THREE WAYS:
 1. WHEN WIRING EITHER THE AIR OR VACUUM SIDE CONNECTOR
 2. USING A FEMALE TO FEMALE EXTENSION CABLE ASSEMBLY

Rev	Description	Date	Approved
A	INITIAL RELEASE	020310	C M

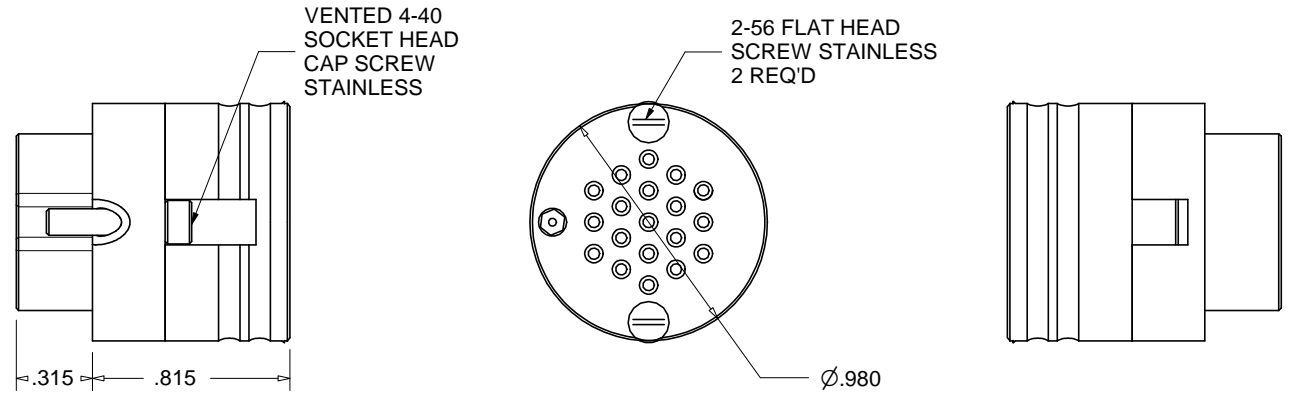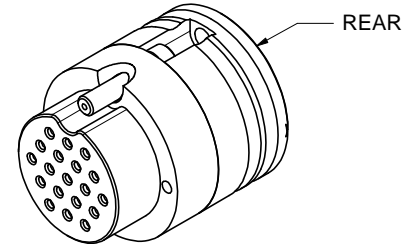

RELATED CONTACTS, TYPE-T2
 P/N 110009, STANDARD, USE WITH 20-24AWG WIRE
 P/N 110035, STANDARD, USE WITH 26-30AWG WIRE
 P/N 100193, CRIMP TOOL FOR TYPE-T2 CONTACTS



Accu-Glass Products Inc.
 25047 Anza Drive
 Valencia, CA 91355
 TEL 818-365-4215
 FAX 818-365-7074
 accuglassproducts.com

Notes:
 1. CONNECTORS DO NOT INCLUDE CONTACTS
 2. WIRES MUST BE THREADED THROUGH THE CONNECTOR REAR PIECE BEFORE CRIMPING THE CONTACTS.

UNCONTROLLED WEB COPY

Material ASSEMBLY	
Tolerances unless otherwise specified.	
.X ± .03	Angular: +/- .5°
.XX ± .01	Finish: Min. 63 Ra
.XXX ± .005	

Title: 19C-PKS 19C PEEK (FEMALE) CONNECTOR PER MIL-C-26482			
Drawn By Date	CR 081709	DWG. NO. 110240	Rev. A
Approved	C M	PDFE	Sheet 1 OF 1