



Notes

- 1. Factory calibrated for 2 PSI (lower pressure calibration available on request)
- 2. Leak tested to 5x10E-10 Standard cc/sec of He

Rev	Description	Date
A	Initial Release	

Flow Rate (SCFM)	* PRV Inlet Pressure (PSIG)
6.21	2.32
9.37	2.61
15.83	3.53
20.63	4.18
25.95	5.11
31.40	6.14

\*Inlet pressure calculated at Albuquerque, NM altitude (12.1 psia)

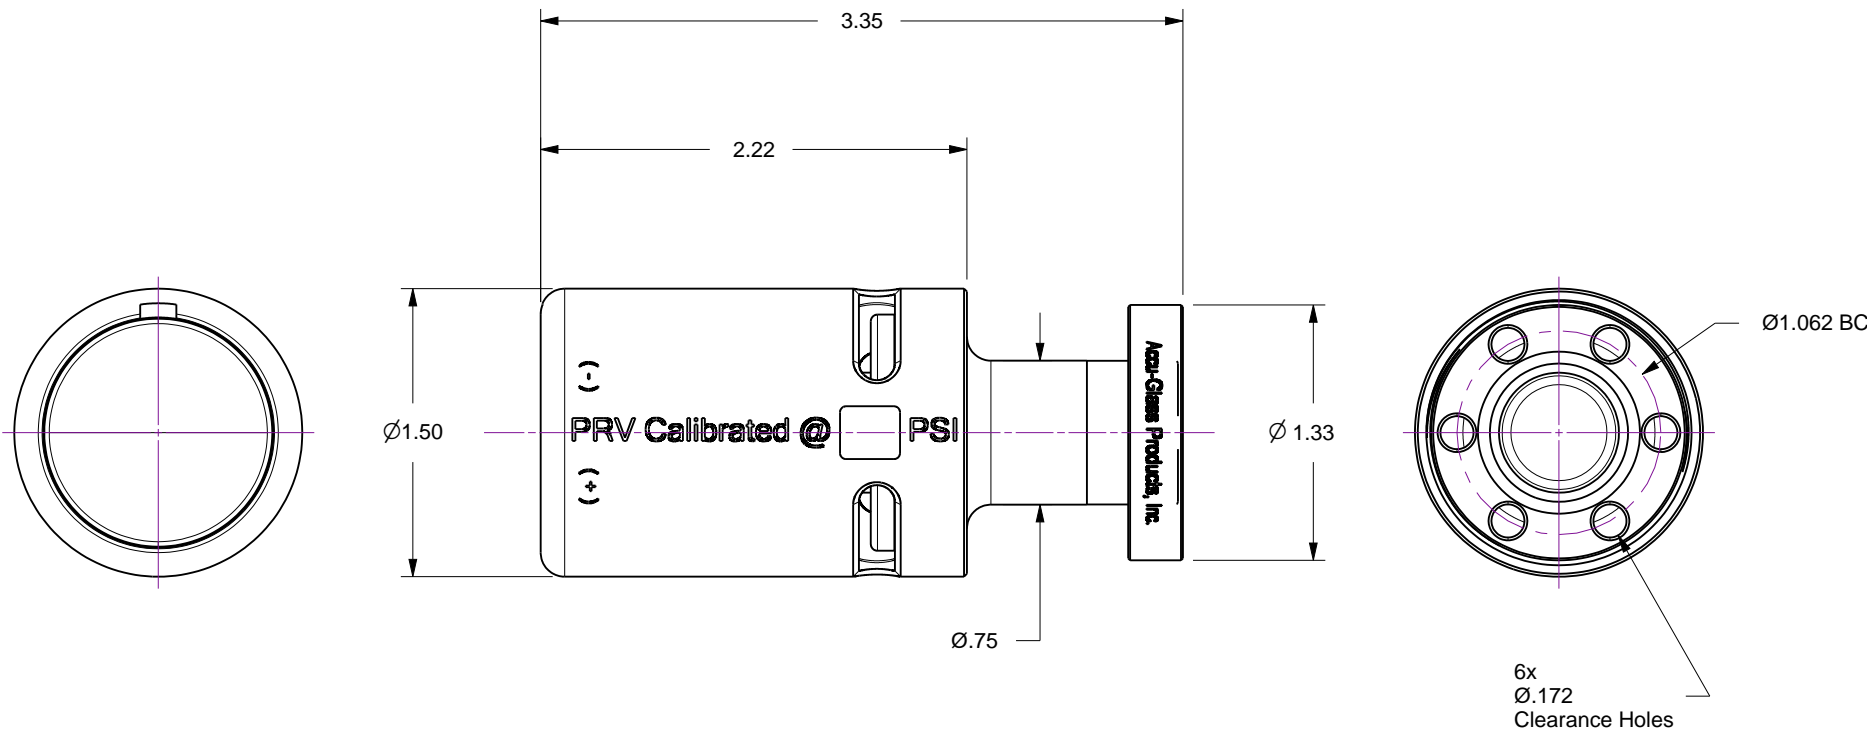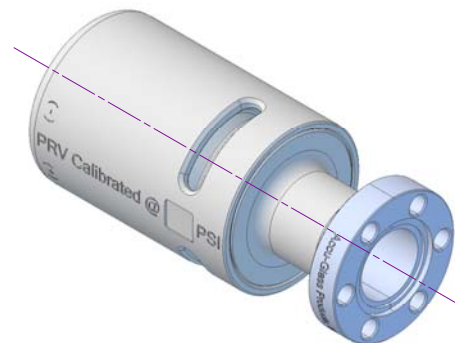

**Accu-Glass Products Inc.**  
 25047 Anza Drive  
 Valencia, CA 91355  
 T 818-365-4215  
 F 818-365-7074  
 www.accuglassproducts.com

**UNCONTROLLED WEB DRAWING**

Proprietary and Confidential  
 The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material See Individual Components	
Tolerances, unless otherwise specified	
.X ± .030	Angles ± 0.5°
.XX ± .010	Finish 63Ra
.XXX ± .005	

Title <b>Valve, 2 PSI Pressure Relief... 1.33 CF</b>			
Drawn by Date	Ligeti 12/22/2014	No. <b>113145</b>	Rev. <b>A</b>
Approved			Sheet